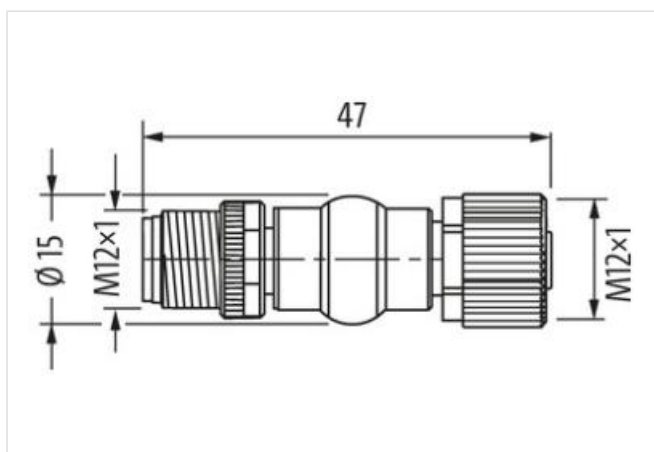
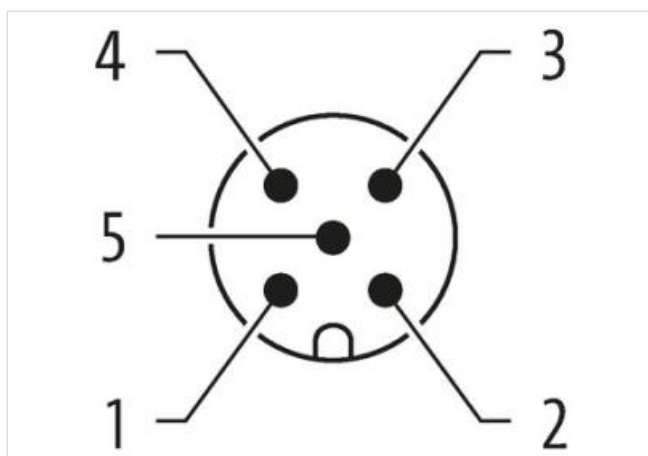
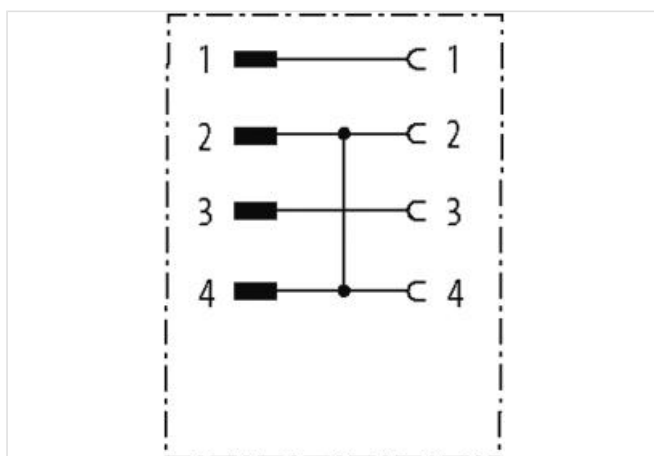
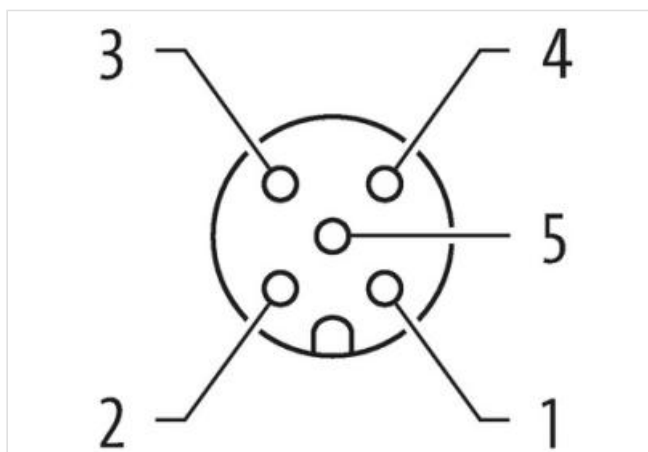


MSBL0-A-T2-4 4POLIG ADAPTER

Adaptador
M12 – M12
4 polos

[Enlace al producto](#)**Ilustración**

El producto puede diferir de la imagen

Datos comerciales	
ECLASS-6.0	27279218
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC001855
GTIN	4048879238922
Número de tarifa arancelaria	85366990
Unidad de embalaje	10
Datos eléctricos Alimentación	
Tensión de servicio CA máx.	24 V
Tensión de servicio CC máx.	24 V
Corriente de servicio por contacto máx.	4 A
Instalación Conexión	
Par de apriete	0,6 Nm
Set de montaje	M12 x 1
Protección de equipos Sistema eléctrico	
Grado de protección (EN IEC 60529)	IP67
Condición adicional grado de protección	insertado, Atornillado
Tensión de aislamiento asignada	800 V
Datos mecánicos Datos de material	
Revestimiento bloqueo	Nickeled
Material carcasa	PUR
Material de bloqueo	Fundición a presión de zinc
Datos mecánicos Datos de montaje	
Modo de montaje	insertado, Atornillado, Protección contra sacudidas
Características del entorno Condiciones climáticas	
Temperatura de servicio mín.	-25 °C
Temperatura de servicio máx.	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.