

Velcro base including velcro for direct mounting


Clamping range 8-35mm, width 20mm, length 180mm

Zócalo con velcro para montaje directo

mounting with M4 or M5 countersunk screw (not included in the delivery)
mounting with M4 or M5 countersunk screw

Enlace al producto

Ilustración

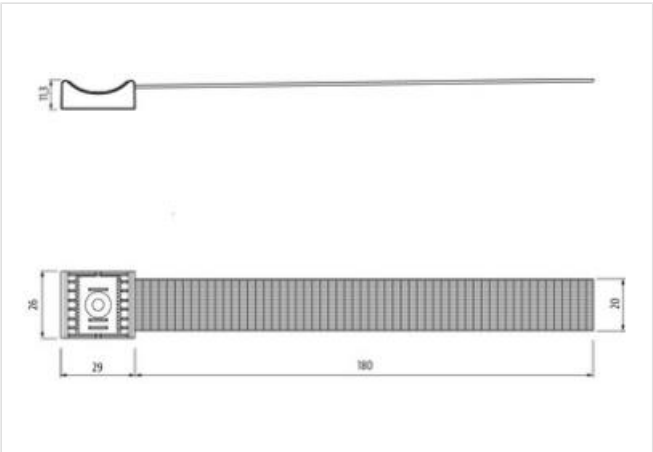

El producto puede diferir de la imagen



Datos comerciales	
ECLASS-6.0	27279221
ECLASS-6.1	27140706
ECLASS-7.0	27140706
ECLASS-8.0	27140706
ECLASS-9.0	27140706
ECLASS-10.1	27140706

ECLASS-11.1	27140706
ECLASS-12.0	27140706
ETIM-5.0	EC002635
GTIN	4065909028018
Número de tarifa arancelaria	63079098
Unidad de embalaje	10
Datos mecánicos Datos de material	
Combustibility class (UL94)	V-0
Material carcasa	PA
Datos mecánicos Datos de montaje	
Sección de bornes mín.	8 mm
Sección de bornes máx.	35 mm
Altura	209 mm
Anchura	26 mm
Profundidad	11,3 mm
Características del entorno Condiciones climáticas	
Temperatura de servicio mín.	-20 °C
Temperatura de servicio máx.	70 °C